

# CLOSE COUPLE LOWBED SERIES |



**Talbert®**  
SINCE 1938

**50CC**



**50CC**



**Stout boxed recessed cross-members** yields extra deep rear bridge boom well; first cross-member recessed additionally.




**Robust, four-cylinder hydraulic removable gooseneck** maximizes lift capacity and load height.



**Best in class lift capacity of any trailer on the market.**

# 50CC

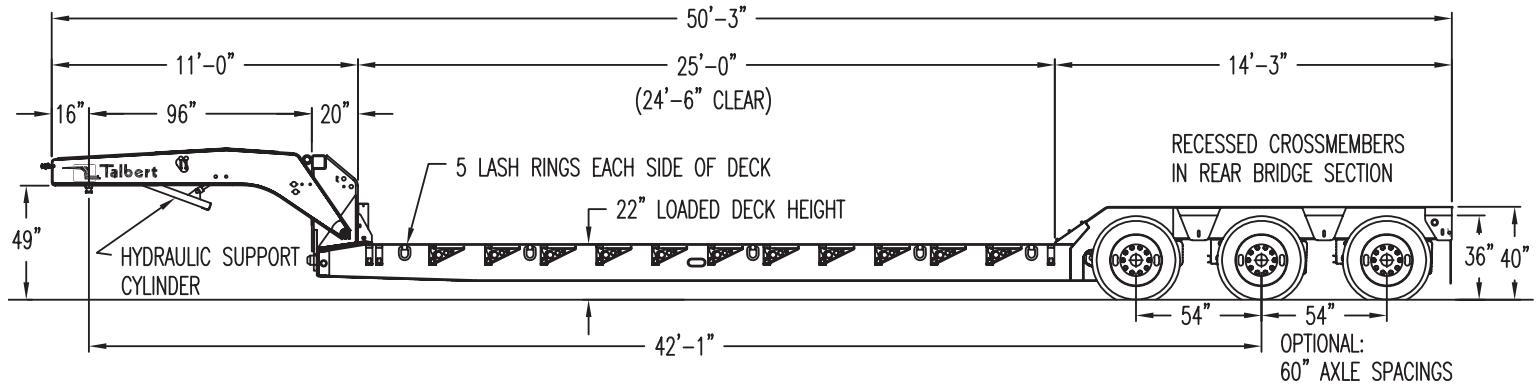

- Non-Ground Bearing Hydraulic Gooseneck Design
- 96 in. Swing Radius (Other Lengths Optional)
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- 25 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 22 in. Loaded Deck Height
- 6 in. Loaded Road Clearance

- 1-1/2 in. Apitong Flooring
- High Strength 100,000 psi Minimum Yield Steel
- Axles: 25,000 lbs. Capacity
- **RIDEWELL** Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Tires: 255/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted with Outboard Brake Drums (ABS Optional)
- Bolsters and Half Bolster on Rear Bridge

- 40 in. Mainbeam / 36 in. Bolster Height
- Boom Well in Rear Bridge
- Spring Parking Brake on Axle Two
- Optional 4th Axle
- 12 Volt LED Sealed Light System
- 102,000 lb. Capacity in 1/2 Deck Length
- Estimated Weight: 18,180 lbs.
- **Valspar** R-Cure 800 Red or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Dealer:

 **Talbert**®  
SINCE 1938