


CLOSE COUPLE LOWBED SERIES |



Talbert®

SINCE 1938

55CC

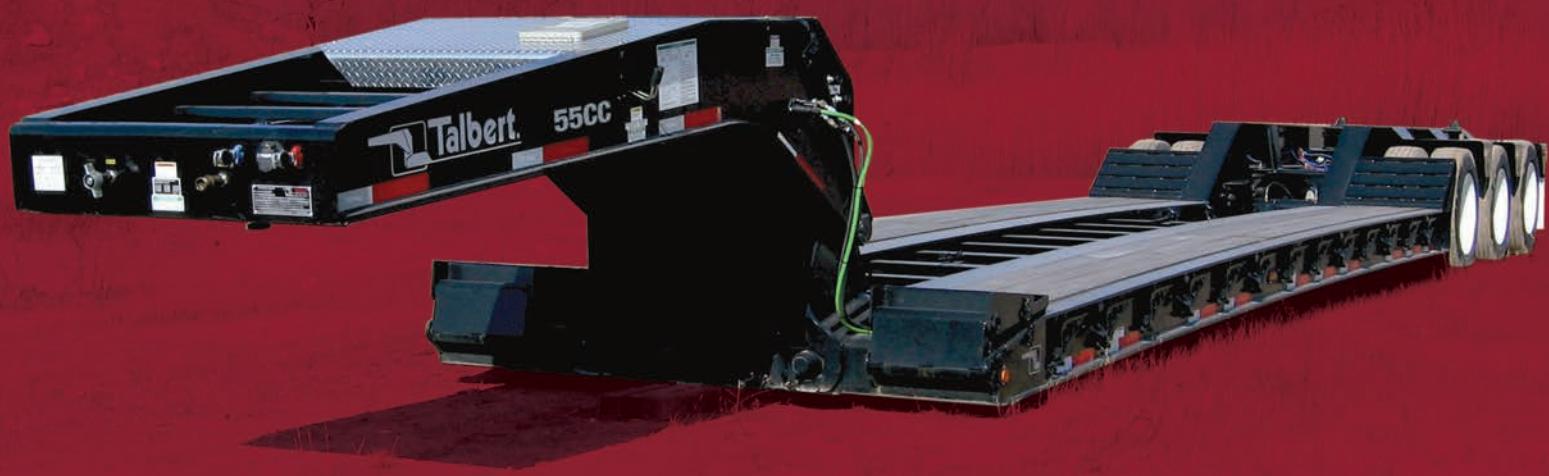


55CC



With an industry-leading 18 inch loaded deck height, the 55CC offers state-of-the-art load versatility.

55CC

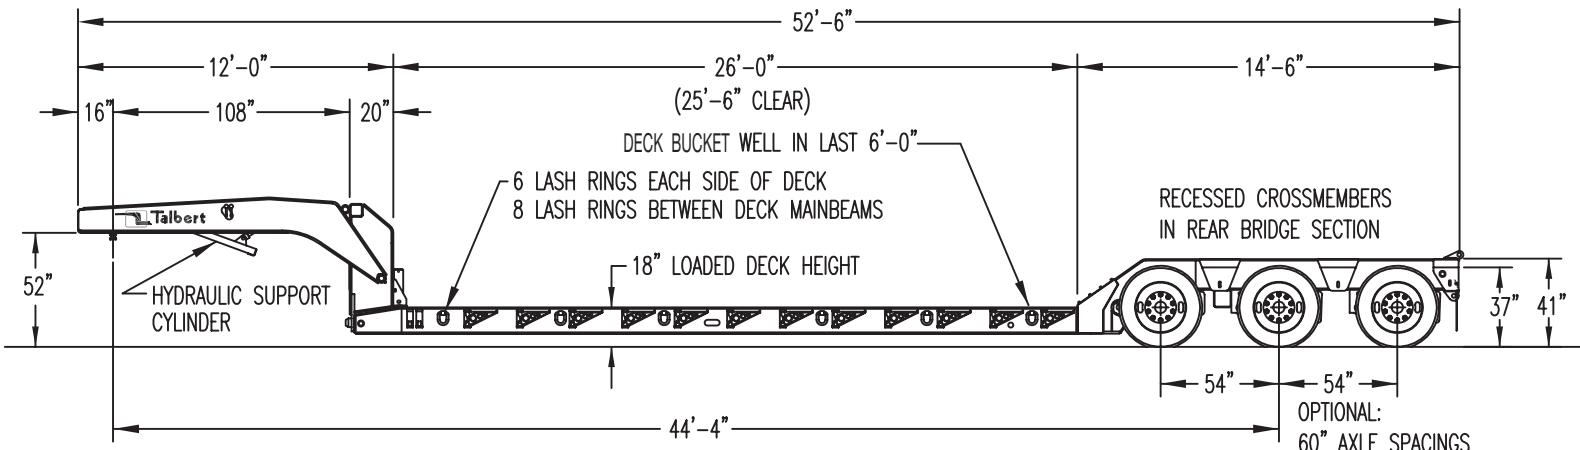

- Non-Ground Bearing Gooseneck Design
- 108 in. Swing Radius (Other Lengths Optional)
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- 26 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 18 in. Loaded Deck Height / 6 in. Loaded Road Clearance
- 1/4 in. Plate Bucket Well in Last 6 ft. of Deck

- 2 in. Apitong Flooring Outboard Mainbeams
- Two Sections Chain Storage
- High Strength 100,000 psi Minimum Yield Steel
- Axles: 25,000 lb. Capacity
- RIDEWELL Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Manual Exhaust Valve
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted with Outboard Brake Drums

- Bolsters and Half Bolster on Rear Bridge
- 41 in. Mainbeam / 37 in. Bolster Height
- Boom Well in Rear Bridge
- Spring Parking Brake on Axle Two
- 4th Axle Capable
- 12 Volt L.E.D. Sealed Light System
- 110,000 lb. Capacity in 1/2 Deck Length
- Estimated Weight: 22,450 lbs.
- Valspar R-Cure 800 Red or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Dealer:

 **Talbert**®
SINCE 1938