

# ROLLER PAVER SERIES



35-55 TON "RP" MODELS



35CC-RP



55CC-RP

RP SERIES



Newly designed, reinforced incline ramps on the 55CC-RP feature solid, one-piece construction.




Optional steel gooseneck fenders with clearance lights protect the tractor and the load from road spray.



Users can load low-profile equipment via adjustable folding ramps with seven-degree front approach.

# 35CC-RP

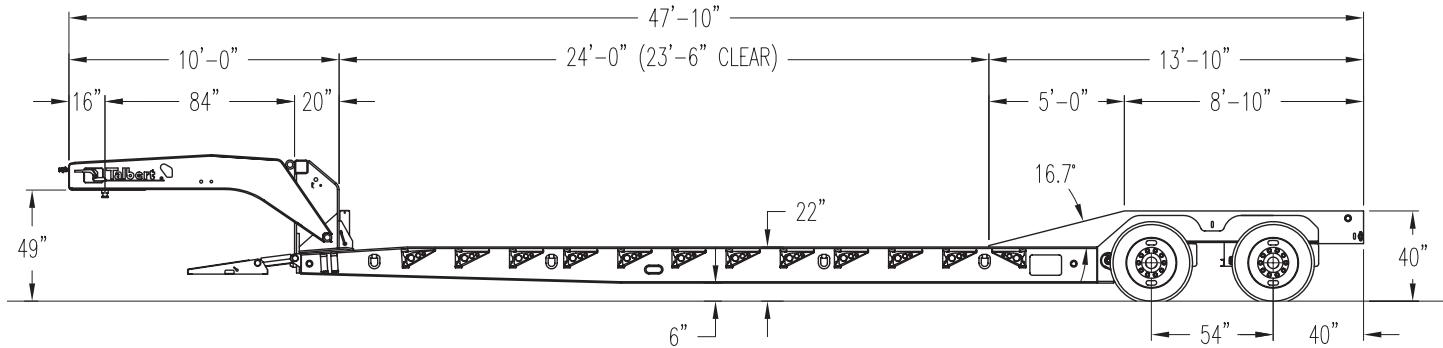


- Low-Profile HRG Gooseneck Design
- 49 in. Loaded Fifth Wheel Height
- 84 in. Swing Radius
- Standard Support Cylinder
- 4 Beam Roller Paver Deck Design
- 47 ft.- 10 in. Overall Length
- 24 ft.- 0 in. (23 ft. 6 in. Clear) Flat Deck
- 22 in. Loaded Deck Height
- 8 ft.-6 in. Deck Width
- 6 in. Loaded Road Clearance

- 50 in. Wood Filled Front Loading Ramp
- Rear Bridge Ramp 5 ft. 0 in. Sloped To Deck
- 1-1/2 in. Apitong Flooring
- 12 in. Swinging/Removable Outriggers
- 1/4 in. Tread Plate Over Tires
- Apitong Between Main Beams
- RIDEWELL Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Ride Height Control: Talbert +3/-3 Valve

- Steel Disc (Hub Piloted) Wheels
- 1 ft. 0 in. Horizontal Beavertail
- 3 in. High Roller Stop
- Lights And Wiring: Sealed Harness
- 4 Lash Rings Each Side Of Deck
- Spring Brakes On 1 Axle
- 70,000 lb. Capacity In 1/2 Deck Length
- Estimated Weight: 18,910 lbs.
- Valspar R-Cure 800 Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

# 55CC-RP

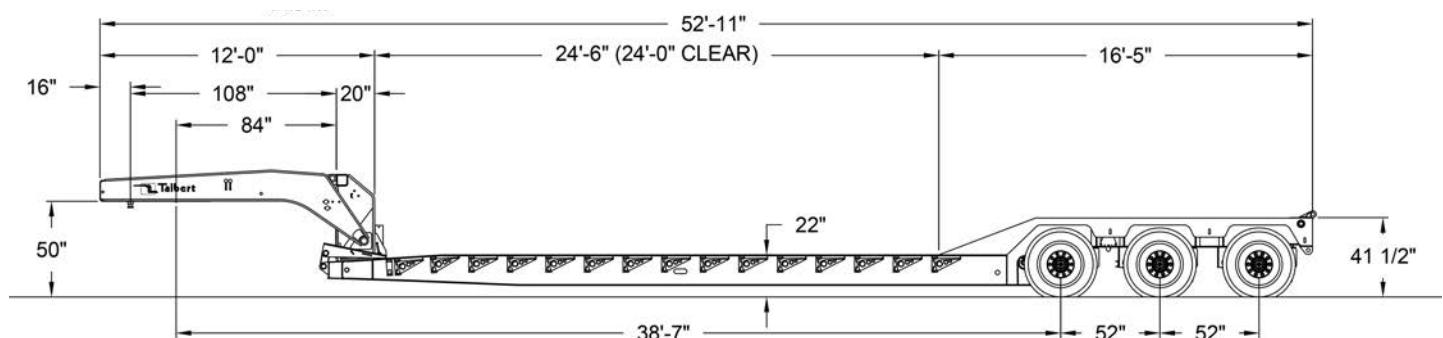

- Low-Profile HRG Gooseneck Design
- 49 in. Loaded Fifth Wheel Height
- 96 in. Swing Radius
- Standard Support Cylinder
- 4 Beam Roller Paver Deck Design
- 52 ft.- 4 in. Overall Length
- 24 ft.- 0 in. (23 ft. 6 in. Clear) Flat Deck
- 22 in. Loaded Deck Height
- 8 ft.-6 in. Deck Width
- 6 in. Loaded Road Clearance

- 50 in. Wood Filled Front Loading Ramp
- Rear Bridge Ramp 5 ft. 0 in. Sloped To Deck
- 1-1/2 in. Apitong Flooring
- 12 in. Swinging/Removable Outriggers
- 1/4 in. Tread Plate Over Tires
- Apitong Between Main Beams
- Suspension: Air Ride with Automatic And Talbert +3 in. / -3 in. Manual Control
- Ride Height Control: Talbert +3/-3 Valve
- Steel Disc (Hub Piloted) Wheels

- 3 in. High Roller Stop
- Lights And Wiring: Sealed Harness
- 6 Lash Rings Each Side Of Deck
- Spring Brakes On 1 Axle
- 110,000 lbs. Distributed  
100,000 lbs. In 16 ft.
- Estimated Weight: 22,400 lbs.
- Valspar R-Cure 800 Red Or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

Dealer:

 **Talbert**®  
SINCE 1938