

# SPREAD AXLE LOWBOY SERIES




**55SA AND 60SA**



## 55SA-60SA



Robust, low-pressure, four-cylinder hydraulic removable gooseneck maximizes lift capacity and load height.

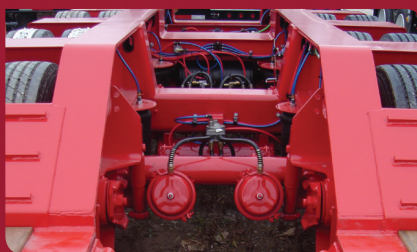


Unique bucket well / boom well configuration provides lowest excavator transport height in the industry.



Allows users to operate as a 3+1 spread-axle with the E1Nitro™. Can also function as four axle close coupled.



# 55SA AND 60SA

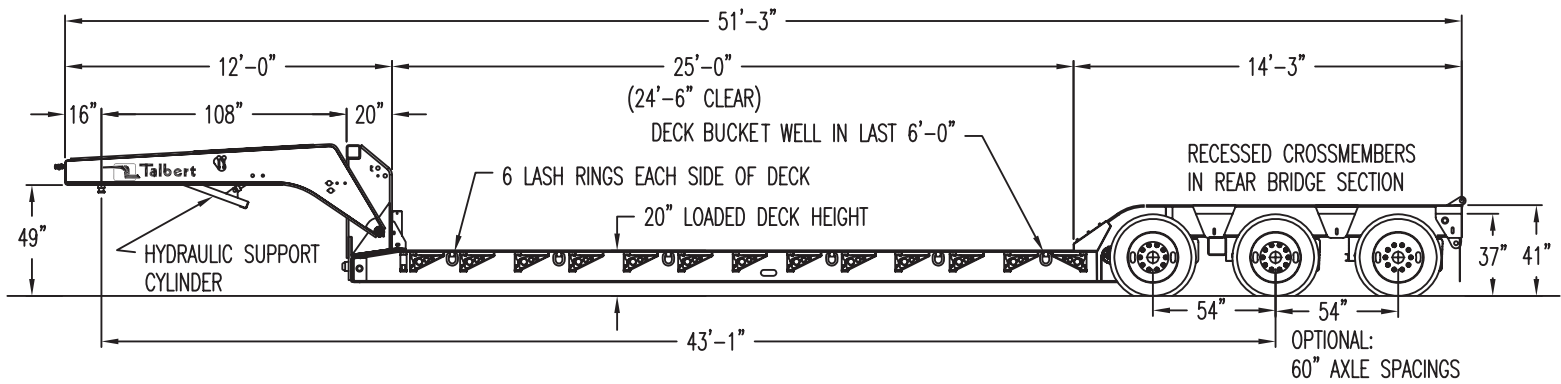

- Non-Ground Bearing Gooseneck Design
- 108 in. Swing Radius (Other Lengths Optional)
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- Deck Length: 25 ft. 0 in
- 55SA Loaded Deck Height: 20 in.
- 60SA Loaded Deck Height: 22 in.
- 6 in. Loaded Road Clearance
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 1/4 in. Plate Bucket Well in Last 6 ft. of Deck
- High Strength 100,000 psi Minimum Yield Steel
- 1-1/2 in. Apitong Flooring (2 in. on 60SA)
- Axles: 25,000 lb. Capacity
- **RIDEWELL** Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Manual Exhaust Valve
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted with Outboard Brake Drums
- Bolsters and Half Bolster on Rear Bridge
- 41 in. Mainbeam / 37 in. Bolster Height
- Bucket Well in Rear Bridge
- Spring Parking Brake on Axle Two
- 4th Axle and 3+1 Spread Capable
- 12 Volt LED Sealed Light System
- **Valspar** R-Cure 800 Red or Black Paint
- 55SA Capacity: 110,000 lb. in 1/2 Deck Length
- 55SA Estimated Weight: 20,850 lbs.
- 60SA Capacity: 120,000 lb. in 1/2 Deck Length
- 60SA Estimated Weight: 22,590 lbs.

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0220 PUB 220D