

SPREAD AXLE EXTENDABLE



55SA TELE



55SA TELE



54'-0" deck length when fully open, offering greater hauling capabilities.




3rd axle and 4th axle attachments can be used as 3 or 4-axle close couple, 3+1 or 2+2 spread axle.



24 in. gooseneck extension standard; other optional lengths available.

55SA TELE

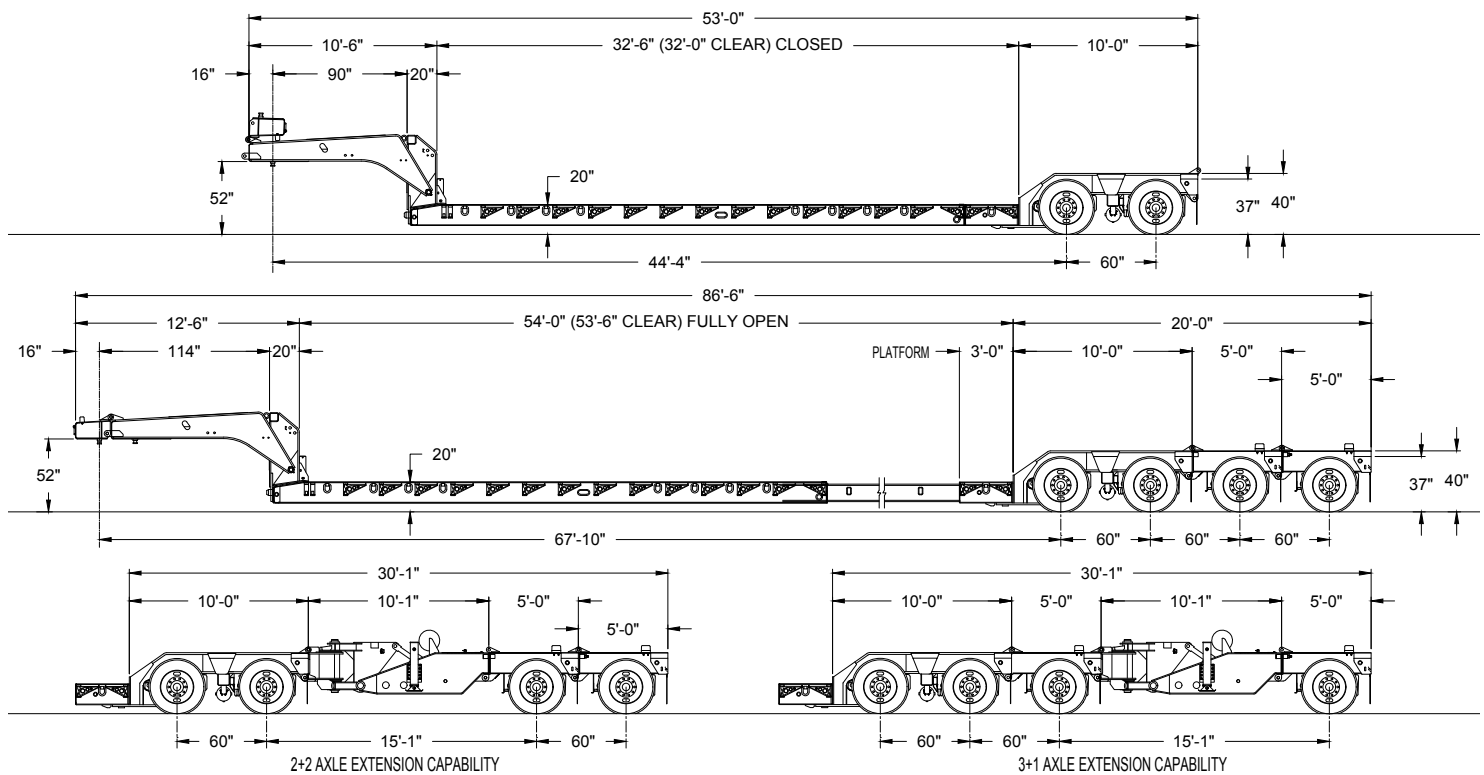

- Capacity: 110,000 lb. In a 14 ft. Two-Point Rigid Load Base (Deck Fully Retracted)
- Capacity: Capacity: 110,000 lb. In a Two-Point Rigid Load Base 4 ft. Less Than Extended Deck Length
- Hydraulic Removable Gooseneck
- 90 in. Swing Radius (114 in. with Gooseneck Extension)
- Hydraulically Operated Support Arm
- Wet-Line Operation (Gas Power Pack Optional)
- 3 ft. 0 in. Rear Deck Platform
- Deck Lengths: 32 ft. 6 in., 34 ft. in., 38 ft. in., 42 ft. 6 in., 46 ft. 6 in., 50 ft. 6 in. and 54 ft. 0 in.
- 12 in. Swinging/Removable Outriggers
- 8 ft. 6 in. Wide Deck and Rear Bridge
- Front Folding Ramps (Optional)
- Four (4) Beam Telescopic Deck Design
- T1/80K Construction
- 20 in. Loaded Deck Height
- 6 in. Loaded Road Clearance
- 1-1/2 in. Apitong Flooring
- Axle Capacity: 25,000 lb.
- RIDEWELL Air Ride Suspension. 3rd and 4th Axles Can be Flipped or Removed
- Talbert +3 in. / -3 in. Raising & Lowering
- Manual Control
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc Hub Piloted
- Connections Rear of Axle 3
- 3rd Axle Can Be Used in 3+1 Spread
- Front Bridge Ramps
- Cambered Telescopic Beams
- Spring Parking Brake on One Axle
- Valspar R-Cure 800 Top Coat Red or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Industry Leading 20 in. Loaded Deck Height



Optional Rolling Bunk - Side View



Optional "RA" - Removable Rear Bridge

Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0717 PUB 237B