

CLOSE COUPLE LOWBED SERIES |



Talbert®
SINCE 1938

35CC



35CC



Stout boxed recessed cross-members yields extra deep rear bridge boom well; first cross-member recessed additionally.




Robust, four-cylinder hydraulic removable gooseneck maximizes lift capacity and load height.



Best in class lift capacity of any trailer on the market.

35CC

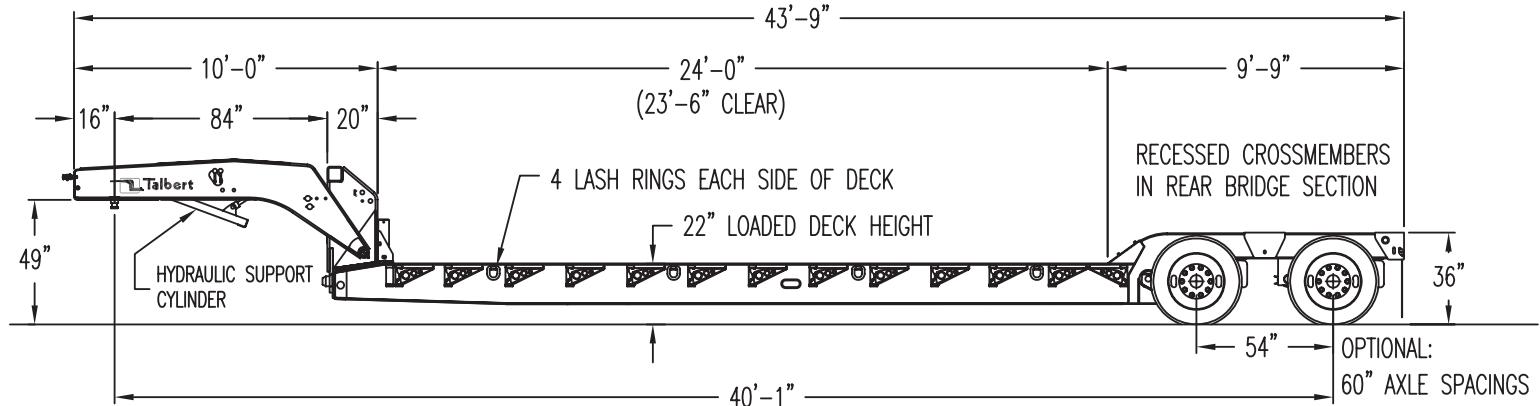

- Non-Ground Bearing Hydraulic Gooseneck Design
- 84 in. Swing Radius (Other Lengths Optional)
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- 24 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 22 in. Loaded Deck Height
- 6 in. Loaded Road Clearance

- 1-1/2 in. Apitong Flooring
- High Strength 100,000 psi Minimum Yield Steel
- Axles: 25,000 lb. Capacity
- *RIDEWELL* Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Tires: 255/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted with Outboard Brake Drums
- Anti-Lock Brake System

- Bolsters and Half Bolster on Rear Bridge
- Adjustable Ride Height (Front and Rear)
- 36 in. Mainbeam / Bolster Height
- Boom Well in Rear Bridge
- Spring Parking Brake on One Axle
- Optional 3rd Axle
- 12 Volt LED Sealed Light System
- 70,000 lb. Capacity in 1/2 Deck Length
- Estimated Weight: 14,540 lbs.
- *Valspar* R-Cure 800 Red or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Dealer:

 **Talbert**®
SINCE 1938